



1 2 3 4 5 6 7 8

REVISIONS

ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

FREQUENCY RANGE	VSWR(RETURN LOSS)
DC-18GHz	1.25 MAX.

5/8-24UNEF-2B

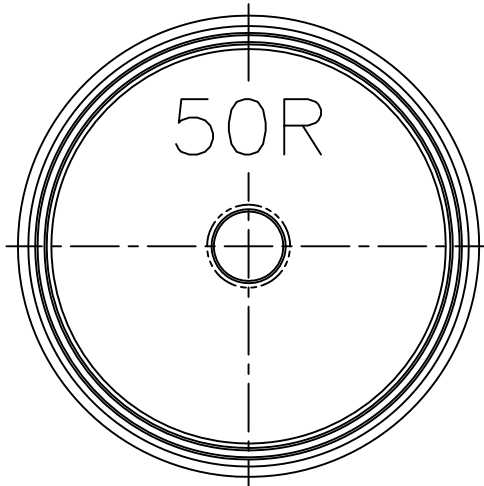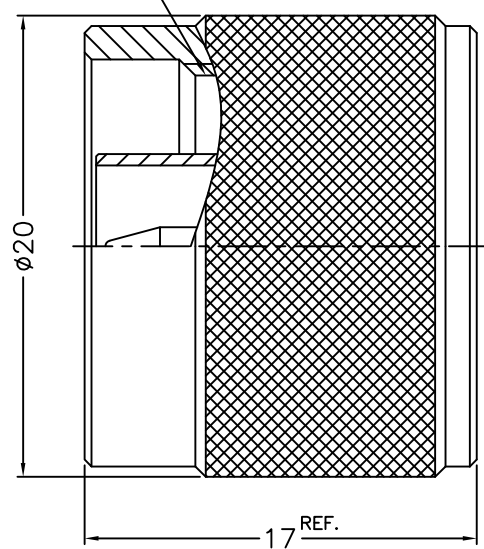

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

- 1. BRASS
- 2. NICKEL PL. 100 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 3. GOLD PL. 3 MIN. THICK OVER NICKEL PL. 50 MIN. THICK OVER COPPER PL. 50 MIN. THICK
- 4. PTFE
- 5. PASSIVATED
- 6. SILICONE RUBBER

RoHS COMPLIANT

8	SHELL	NOTE 1	NOTE 2		
7	RETAINER RING	SUS 304	NOTE 5		
6	GASKET	NOTE 6	RED		
5	INSULATOR	NOTE 4	NATURAL		
4	BODY	NOTE 1	NOTE 2		
3	COVER	NOTE 1	NOTE 2		
2	RESISTOR	50R	NATURAL		
1	CONTACT PIN	NOTE 1	NOTE 3		
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS			
UNLESS OTHERWISE SPECIFIED TOLERANCES			
0.5-6	=	±0.2	
6-30	=	±0.4	
30-120	=	±0.6	
120-315	=	±1	
315-1000	=	±1.6	
1000-2000	=	±2.4	
SCALE	3/1	ISSUE	3

PART NO.	
APPROVED	DATE 07-08-'21
CHECKED	DATE 07-08-'21
DRAWN BRIAN	DATE 07-08-'21

G.L.I.	
TITLE N TERMINATOR PLUG (50 ohms)	
DRAWING NO. 5824-1004A9-50	
FILE NO. R:\D\DWG\5824\1004A9\50-3	

1 2 3 4 5 6 7 8

F

E

D

C

B

A

F

E

D

C

B

A