



1 2 3 4 5 6 7 8

REVISIONS		
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE

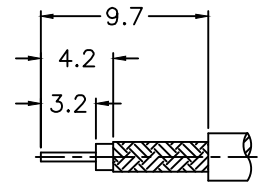

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

5/8-24UNEF-2A

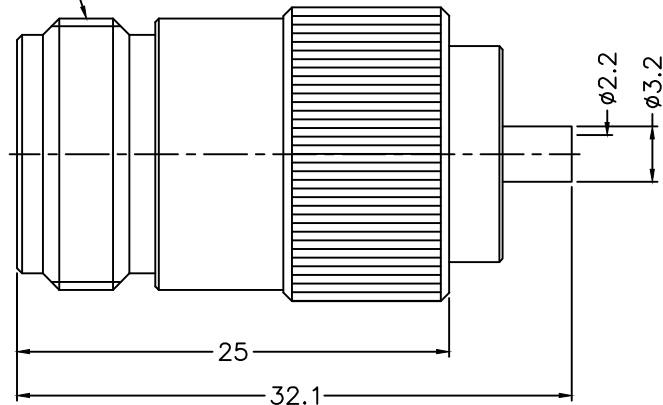

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS
 2. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
 3. PHOSPHOR BRONZE
 4. GOLD PL. 3 MIN. OVER NICKEL PL. 50 MIN. OVER COPPER PL. 50 MIN.
 5. TEFLON

1. CRIMPED FERRULE
HEX CRIMP SIZE .100"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7mm

RoHS COMPLIANT

8	FERRULE	NOTE 1	NOTE 2	1	FR-20-32-90
7	INSULATOR	NOTE 5	NATURAL	1	5824-6421G2-10T
6	CONTACT PIN	NOTE 1	NOTE 4	1	PIN-04-095-55
5	INSULATOR	NOTE 5	NATURAL	1	5824-6421G1-5-50T
4	CONTACT PIN	NOTE 3	NOTE 4	1	5824-6421G1-4
3	BARREL	NOTE 1	NOTE 2	1	5824-6421G2-3-01
2	INSULATOR	NOTE 5	NATURAL	1	5824-6421G1-2T
1	BODY	NOTE 1	NOTE 2	1	5824-6121G2-1
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED TOLERANCES
0.5-6 = ±0.2
6-30 = ±0.4
30-120 = ±0.6
120-315 = ±1
315-1000 = ±1.6
1000-2000 = ±2.4

PART NO.	
APPROVED	DATE 03-20-'15
CHECKED	DATE 03-20-'15
DRAWN	DATE 03-20-'15

G.L.I.

TITLE	N CRIMP JACK (FOR RG-178, 196A/U)
DRAWING NO.	5824-6121G3-01-50
FILE NO.	R:\D\G\DWG\5824\6121G3\01\50

1 2 3 4 5 6 7 8

F
E
D
C
B
A

F
E
D
C
B
A